

## City of Cathedral City Community Development Department

### **Building & Safety Division**

68-700 Avenida Lalo Guerrero, Cathedral City, CA 92234 Tel: 760.770.0340 | Fax: 760.202.1460 www.cathedralcity.gov

#### PRIVATE SWIMMING POOL FENCING/BARRIER REQUIREMENTS: 2022 CBC SECTION 3109.2

#### INTENT:

The intent of the swimming pool barrier requirement is to prevent the uncontrolled access to a pool or spa by children from adjacent properties and from the home.

#### **DEFINITIONS:**

Swimming pool or pool means any structure intended for swimming or recreational bathing that contains water over 18 inches deep. Swimming pool includes in-ground and aboveground structures and includes, but is not limited to, hot tubs, spas, portable spas, and non-portable wading pools.

Enclosure means a fence, wall, or other barrier that isolates a swimming pool from access to the home.

Approved safety pool cover means a manually or power-operated safety pool cover that meets all of the performance standards of the American Society for Testing and Materials (ASTM), in compliance with standard F1346-91.

Exit alarms means devices that make audible, continuous alarm sounds when any door or window, that permits access from the residence to the pool area that is without any intervening enclosure, is opened or is left ajar. Exit alarms may be battery operated or may be connected to the electrical wiring of the building.

#### CONTRACTOR'S RESPONSIBILITY:

Any person entering into an agreement to build a swimming pool or spa shall give the consumer notice of the requirements of the swimming pool barrier. (Health and Safety Code Section 115924)

#### **REQUIRED SAFETY FEATURES:**

#### **PART A**

The pool shall be isolated from access to a home by a permanent, non-removable enclosure that meets the following requirements prior to filling with water:

- Any access gates through the enclosure open away from the swimming pool and are self-closing with a selflatching device placed no lower than 60" above the ground.
- · A minimum height of 60".
- Maximum vertical clearance from the ground to the bottom of the enclosure of 2".
- · Gaps or voids, if any, do not allow passage of a sphere equal to or greater than 4" in diameter.
- An outside surface free of protrusions, cavities, or other physical characteristics that would serve as handholds or footholds that could enable a child below the age of five years to climb over.

Rev. 02/27/23 Page 1 of 4

- In all cases, owners/occupants are responsible for maintaining all required enclosures/barriers and safety elements.
- The top of the barrier shall be at least 60 inches above grade measured on the side of the barrier that faces away
  from the swimming pool. Any gates other than pedestrian access gates shall be equipped with lockable hardware
  or padlocks and shall remain locked at all times when not in use.

#### **PART B**

In addition to Part A above, at least one additional drowning prevention feature of the six listed below shall be incorporated.

Note, however, that where a wall of a group R, Division 3 occupancy (including attached garage) serves as part of the barrier, items 3 or 4 shall be required as part of the barrier.

- #1. The pool shall incorporate a removable mesh pool fencing enclosure that meets ASTM F2286 in conjunction with a gate that is self-closing and self-latching and can accommodate a key lockable device.
- #2. The pool shall be equipped with an approved safety pool cover meeting ASTM F1346-91.
- #3. The residence shall be equipped with exit alarms on those doors providing direct access to the pool or spa. The exit alarms may cause either an alarm noise or a verbal warning, such as a repeating notification that "the door to the pool is open."
- #4. All doors providing direct access from the home to the swimming pool or spa shall be equipped with a self-closing, self-latching device with a release mechanism placed no lower than 54" above the floor.
- #5. An alarm that, when placed in a pool or spa, will sound upon detection of accidental or unauthorized entrance into the water. The alarm shall meet and be independently certified to the ASTM Standard F2208.
- #6. Other means of protection, if the degree of protection afforded is equal to or greater than that afforded by any of the features set forth above and has been independently verified by an approved testing laboratory as meeting standards for those features established by the ASTM or the American Society of Testing Mechanical Engineers (ASME).

#### **Above Ground Spas and Hot Tubs**

Hot tubs and spas that have a locking safety cover that complies with the American Society for Testing Materials-Emergency Performance Specifications (ASTM-ES 13-89) are exempt from the above barrier requirements.

Rev. 02/27/23 Page 2 of 4

#### 2022 CALIFORNIA BUILDING CODE SECTION 3109.2 **H&S CODE SECTIONS 115920-115929**

PART A POOL ENGLOSURE COMPLY WITH SECTION 115923.

ITEM #6. Other means of protection, if the degree of protection afforded is equal to or greater than that afforded by any of the devices set forth in items 1-5 and have been independently verified by an approved testing laboratory as meeting standards for those devices established by the ASTM or the American Society of Mechanical Engineers (ASME).

ITEM #1. REMOVABLE MESH FENCING SURROUNDING POOL MEETING ASTM 2286. POOL ITEM #5. POOL ALARM MEETING ASTM F2208. ITEM #2. SAFETY POOL COVER MEETING ASTM F1346-91. ITEM #3 AND #4. AUDIBLE ALARM OR SELF-CLOSING SELF-LATCHING WITH THE LATCH DEVICE NOT LESS THAN 54" ABOVE FLOOR. ACCESS GATES SHALL SWING AWAY, BE SELF-CLOSING, SELF-LATCHING WITH LATCH DEVICE NO LOWER THAN 60" ABOVE THE GROUND (REFERENCE PART A).

ITEM #3 AND #4. AUDIBLE ALARM OR SELF-CLOSING SELF-LATCHING WITH THE LATCH DEVICE NOT LESS THAN 54" ABOVE FLOOR.

A VEHICLE GATE IS NOT REQUIRED TO BE SELF-CLOSING OR SELF-LATCHING WHEN EQUIPPED WITH LOCKABLE HARDWARE OR A PADLOCK AND REMAINS LOCKED AT ALL TIMES WHEN NOT IN USE. (REFERENCE PART A).

# MAIN STREET

An alarm installed on all doors with direct access to the pool. The alarm shall sound continuously for a minimum of 30 seconds within seven seconds after the door and its screen, if present, are opened, and be capable of providing a sound pressure level of not less than 85 dBA when measured indoors at 10 feet. The alarm shall automatically reset under all conditions. The alarm system shall be equipped with a manual means, such as a touchpad or switch, to temporarily deactivate the alarm for a single opening. Such deactivation shall last no longer than 15 seconds. The deactivation switch shall be located at least 54 inches above the threshold of the door. Pedestrian doors leading from a garage to the pool area must be self-closing and self-latching with the latching mechanism located a minimum of 54 inches above the threshold of the door.

THE BARRIER/ENCLOSURE/PROTECTION DEVICES MUST BE INSTALLED AND INSPECTED PRIOR TO PLASTERING OR FILLING THE POOL/SPA/HOT TUB WITH WATER.




#### CITY OF CATHEDRAL CITY **BUILDING & SAFETY DIVISION**


BARRIERS FOR SWIMMING POOLS, SPAS & HOT TUBS

Ph: (760) 770.0340 68-700 AVE. LALO GUERRERO, CATHEDRAL CITY, CA 92234

3 of 4 02/27/2023 Fax: (760) 202.1460

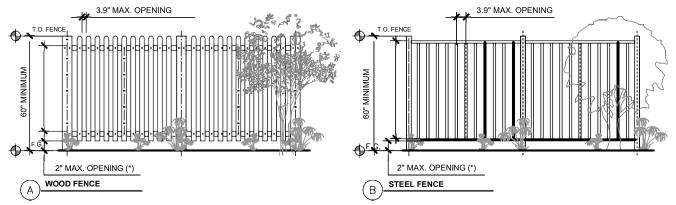


(\*) NOTE FOR WOOD & STEEL FENCE: 4" MAX. OPENING ALLOWED WHERE SURFACE BELOW IS CONCRETE OR ASPHALT.

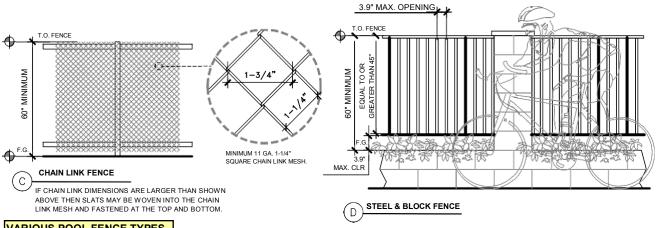

#### VARIOUS POOL FENCE TYPES

(NOT ALL POSSIBLE FENCE DESIGNS ARE SHOWN. PLEASE CHECK WITH PLANNING DIVISION TO VERIFY ALLOWED FENCING TYPES.)

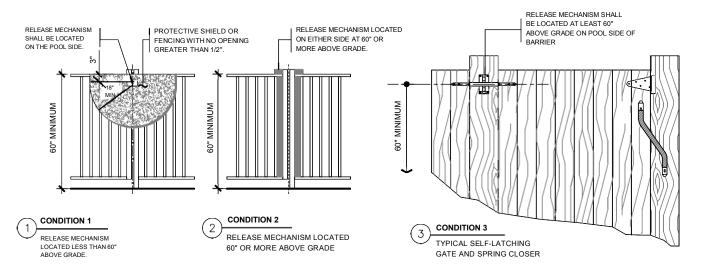

#### **GATE LATCHING REQUIREMENTS**

NOT ALL POSSIBLE DESIGNS ARE SHOWN; PLEASE CHECK WITH YOUR INSPECTOR FOR MORE INFORMATION.

Cathedral City	CITY OF CATHEDRAL CITY BUILDING & SAFETY DIVISION		
	BARRIERS FOR S	WIMMING POOLS,	SPAS & HOT TUBS
Ph: (760) 770.0340	68-700 AVE. LALO GUERRERO, CATHEDRAL CITY, CA 92234		
Fax: (760) 202.1460	02/27/2023		4 of 4